




- 20187000**
- A direnci kullanıldığında SBKE
- 
- The graph displays the relationship between flow rate (Q) and pressure (Pressure) for the SBKE system with the A direnci. The x-axis represents flow rate in l/min, ranging from 0 to 24 with major ticks every 4 units and minor ticks every 1 unit. The y-axis represents pressure in bar, ranging from 0 to 6 with major ticks every 1 unit and minor ticks every 0.2 units. The curve starts at the origin (0,0) and increases non-linearly, reaching a pressure of approximately 6 bar at a flow rate of 18.4 l/min.
- | Q (l/min) | Pressure (bar) |
|-----------|----------------|
| 0         | 0              |
| 4         | 0.2            |
| 8         | 0.8            |
| 12        | 2.2            |
| 16        | 4.2            |
| 18.4      | 6.0            |

## 20 187 000 EUROCOSMO 3 DELİKLİ LAVABO BATARYASI 1/2" S-BOYUT

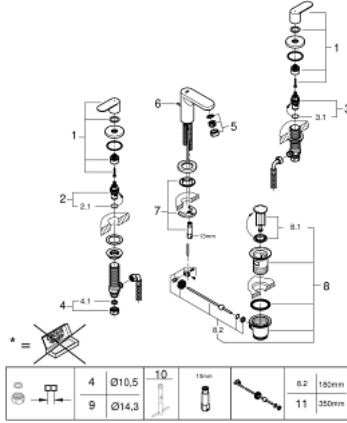

### YEDEK PARÇALAR, Ağustos 2019 – now

- 1: Handle pair (Sipariş no. 48306000)
  - 2: Seramik salmastra, 1/2" (Sipariş no. 45882000)
  - 2.1: O-ring Ø18,2 x Ø1,7 (Sipariş no. 0392400M)
  - 3: Seramik salmastra, 1/2" (Sipariş no. 45883000)
  - 3.1: O-ring Ø18,2 x Ø1,7 (Sipariş no. 0392400M)
  - 4: Bağlantı Somunu 1/2" (Sipariş no. 1290100M)
  - 4.1: İnce conta Ø18,5 x Ø12 x 2 (Sipariş no. 0138900M)
  - 5: Perlatör (Sipariş no. 13929000)
  - 6: Kumanda çubuğu (Sipariş no. 46739000)
  - 7: Vida bağlantılı montaj (Sipariş no. 46671000)
  - 8: Gider seti 1 1/4" (Sipariş no. 28910000)
  - 8.1: tapa (Sipariş no. 07182000)
  - 8.2: Top çubuk (Sipariş no. 07052000)
  - 9: Bağlantı somunu 1/2" x 14.5 mm (Sipariş no. 1290200M)\*
  - 10: İngiliz anahtarı (Sipariş no. 19017000)\*
  - 11: Top çubuk (Sipariş no. 07341000)\*
- \*Özel aksesuarlar